


Lighting of Angle-shaped Lighting-tilting

Irradiation of multi-angle(0-90)



- Four surfaces of an angle-movable direct bar lighting are attached to one lighting and the irradiating angle can be changed freely. Able to be applied to the change of a distance to the work.
- Four surfaces have each independent circuit, and thus each luminescence surface can regulate different colors or light. A diffusing ring(option) can be mounted.

External Dimension Drawing

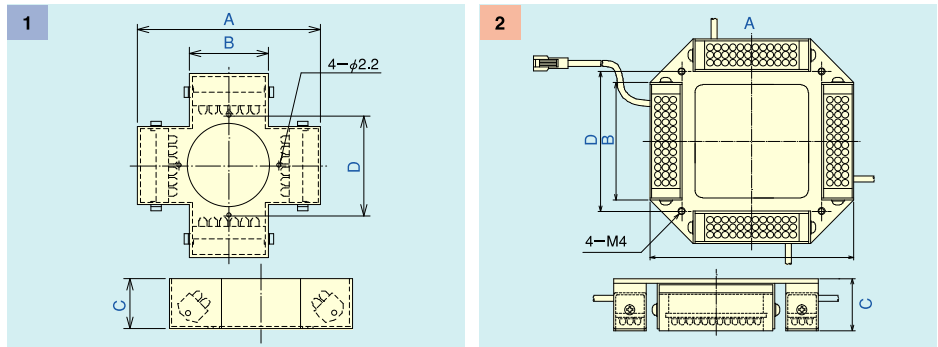

Specification

Model	Color	Size				The Number of LED	Power Consumption	Dimension
		A	B	C	D			
MDB-Q230R	Red	70	30	19	38	12×4	2	1
MDB-Q230W	White	70	30	19	38	12×4	3.9	
MDB-Q360R	Red	108	62	27.3	74	36×4	5.8	2
MDB-Q360W	White	108	62	27.3	74	36×4	11.6	
MDB-Q690R	Red	155	86	34	100	108×4	17.3	
MDB-Q690W	White	155	86	34	100	70×4	23.2	

*The number of holes and pitch are different, depended on the model number (Please ask us for further information).
 * We also manufacture green, blue, and IR.